

“Finally, an insulating foam that doesn’t buckle or bow window and door frames!”



WINDOW & DOOR

INSULATING FOAM SEALANT



GREAT STUFF Pro Series Window & Door Insulating Foam Sealant is exclusively formulated to air seal the gap between the window or door and its rough opening.

Low Pressure Formulation

- *Replaces 13 quart tubes of caulk*
- *Air Seal up to 6 Windows*
- *Stops Drafts and Energy Loss*
- *Better Than Fiberglass*



Available in both gun and straw foam



An Industry Breakthrough in Insulating Foam Sealants...

GREAT STUFF Pro Series Window & Door Insulating Foam Sealant


FULL SCALE TESTING

THE CHALLENGE: All foams were tested on 3' x 6' double hung, vinyl replacement windows. The rough opening gaps were overfilled (80%+). The average operating force to open or close the windows was 25 lbs. before foaming.

THE STANDARDS: ASTM's Standard Practice for Installation of Windows states "an installed foam fill shall not distort the frame more than one-sixteenth (0.0625) inch along any side."

AAMA Guidelines state sashes "shall operate in either direction with a force not exceeding 30 lbs. for residential windows."

RESULTS 24 HOURS AFTER

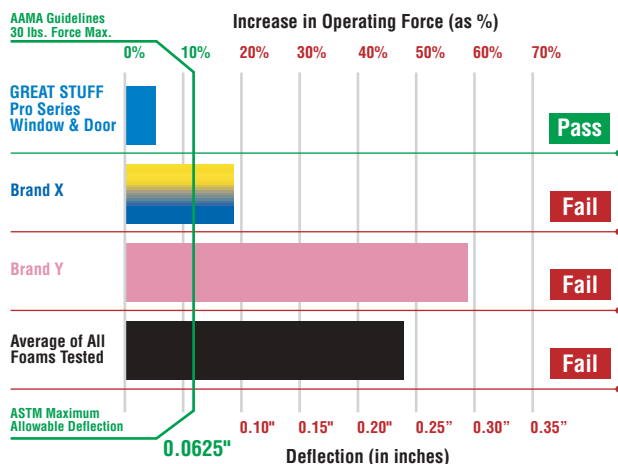

COMPARISON

FIBERGLASS CHINKING

- "Stuffed" into gap
- Does not expand
- Retains moisture
- Time consuming to install
- Provides some insulative value
- Conforms to ASTM standards

vs.
vs.
vs.
vs.
vs.
vs.

GREAT STUFF PRO SERIES WINDOW & DOOR

- Proprietary low pressure formula
- Expands to fill gap
- Repels/deflects water
- Installs in minutes
- Provides real insulative value
- Conforms to ASTM & AAMA standards
- Professional foam applicator tool with fully adjustable flow control
- Soft, pliable yellow foam
- Affordable price point
- Yields same as 13 quart tubes of caulk

BENEFITS TO HOME OWNER/INSTALLER

- Proven not to distort frame; no customer complaints or callbacks.
- Creates air barrier to save energy costs for heating & cooling.
- Water resistant bond prevents/retards wood rot and other weather related problems.
- Saves time & labor costs.
- Complements energy efficiency of window or door.
- Industry acceptance
- Precise control
- Easy to gauge flow rate & volume
- No post-dispensing drip or ooze with gun foam applicator; restartable for up to 30 days.
- Forgiving, easier to remove if gap is overfilled.
- Easily identifiable yellow color
- One 20 ounce can will foam up to six average sized residential windows (36" x 60", 3/8" wide gap, 1" deep).
- More cost effective than caulk

(800) 800-3626

www.dowgreatstuff.com



THE DOW CHEMICAL COMPANY

1881 West Oak Parkway,
Marietta, GA 30062
800-800-FOAM (3626)

* Trademark of THE DOW CHEMICAL COMPANY